




PRODUCT CARD

Surge/EMI-RFI Protector LF 530BWA G-A*

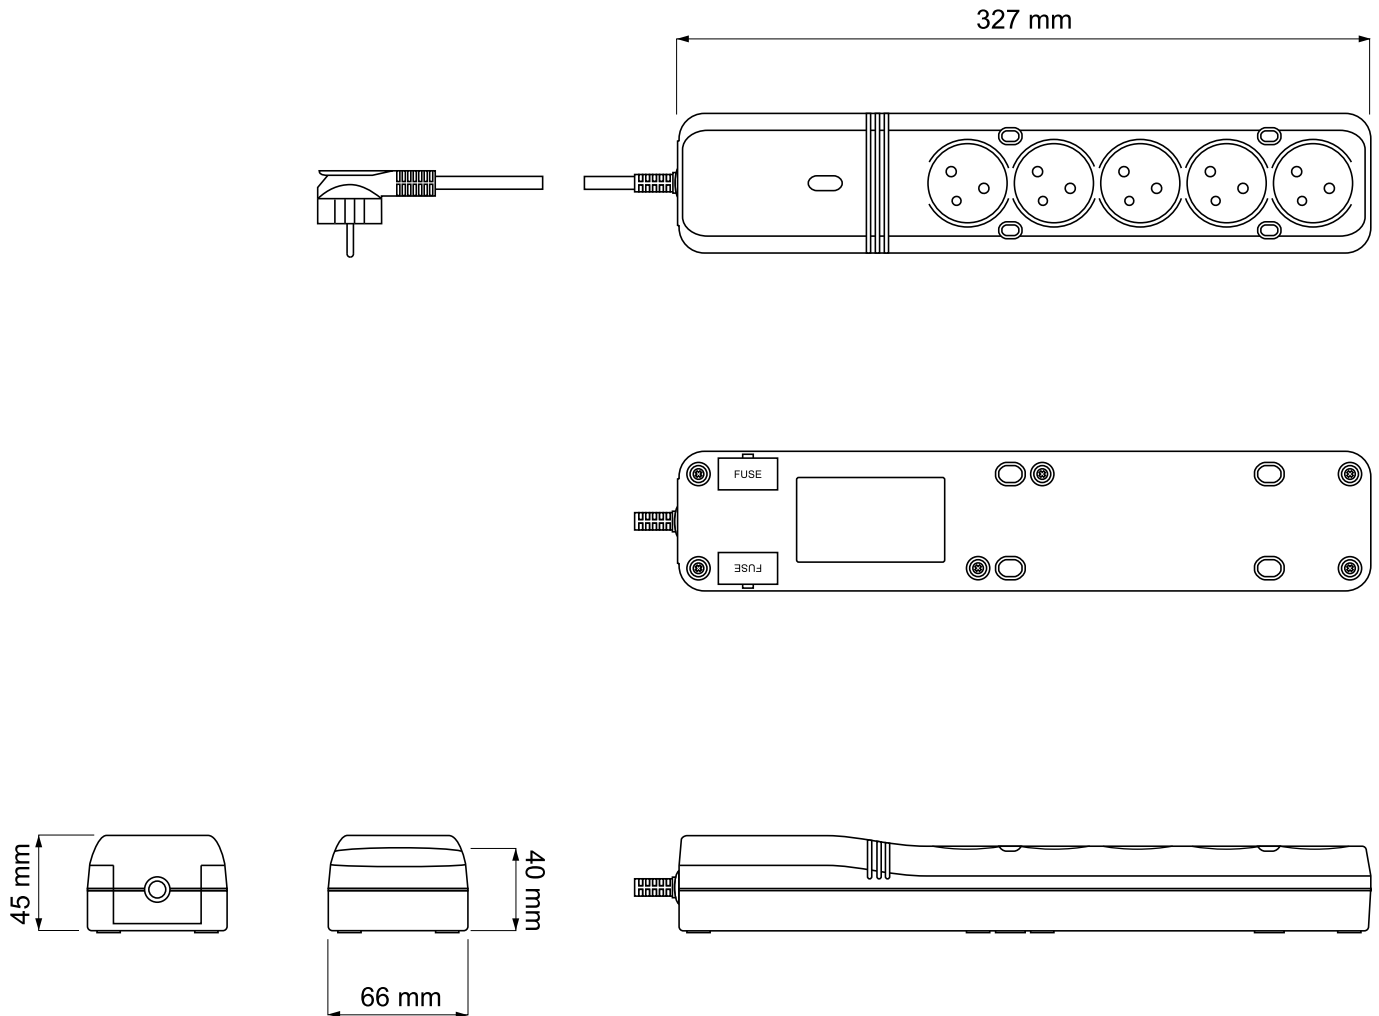

Technical Data:	
Continous operating voltage U_c	~250V, 50Hz
Voltage rating U_N	~230V, 50Hz
Rated current I_N	10A
Energy absorbtion Joules Σ	480J
Max. spike amperage I_{MAX} Σ	15,5 kA (8/20 μ s) 6,5kA(L/N), 4,5kA(L,N/PE)
Response time	<25ns
Noise supersion	100KHz÷3MHz 50db 3MHz÷30MHz 40db
Outfloc current	<0,5mA
Switch	N/A
Fuse	2x10A/250V
Cable length	L-1,5÷5,0m

* COLORS:
GR - GREY
BL - BLACK

DATE:	PREPARED:	CONFIRMED:	MODEL:	PAGE 1
			LF 530BWA G-A*	KK-6/EN