




PRODUCT CARD

Surge Protector LV 430WA G-A*

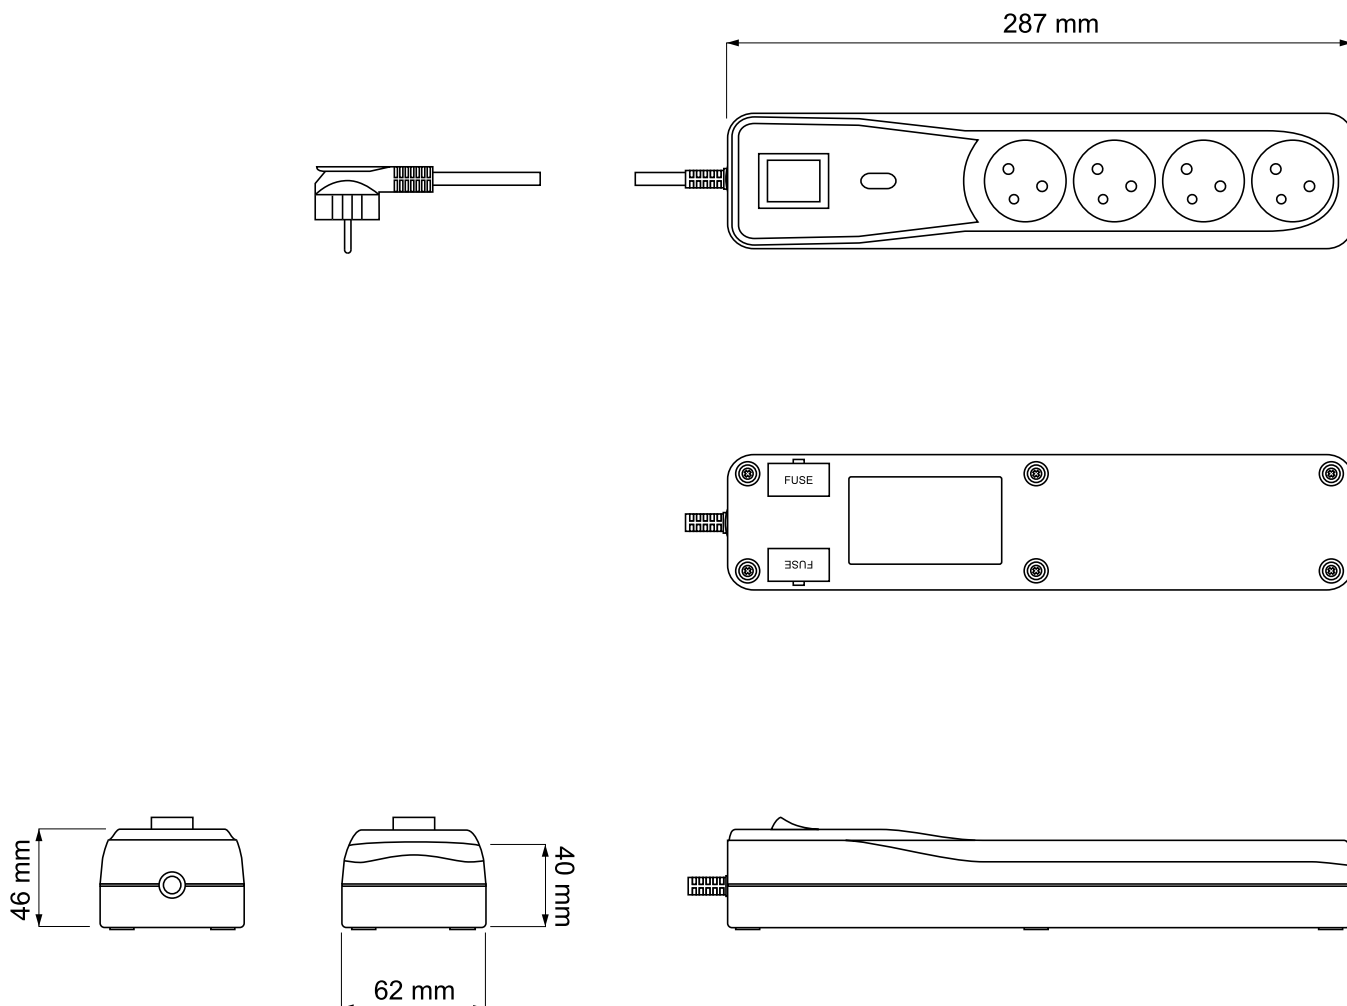

Technical Data:	
Continuous operating voltage U_c	~250V, 50Hz
Voltage rating U_N	~230V, 50Hz
Rated current I_N	10A
Energy absorption Joules Σ	435J
Max. spike amperage I_{MAX} Σ	13,5 kA (8/20 μ s) 4,5kA(L/N), 4,5kA(L,N/PE)
Response time	<25ns
Outflow current	<0,5mA
Switch	Not illuminated
Fuse	2x10A/250V
Cable length	L-1,5 \pm 5,0m

* COLORS:
GR - GREY
BL - BLACK

DATE:	PREPARED:	CONFIRMED:	MODEL:	PAGE 1
			LV 430WA G-A*	KK-13/EN